

Type 0AKL

Electric Vehicle Auxiliary Fuses

0AKL Series

RoHS Compliant

Description

General purpose fuse for EV/HEV

Features

- Excellent DC performance
- Design refer to JASO D622:2006(for 10A-30A)
- Design to EV fuse standard UL248-20(for 40A-50A)
- Reliability performance design refer to ISO8820-8&GB/T31465.6(for 40A-50A)
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863

Applications

EV or HEV application





UK CA CE

Electrical Characteristics

% of Ampere Rating (A)	10A-30A		40A-50A	
	Operating Time (Unit: s)		Operating Time (Unit: s)	
	Min.	Max.	Min.	Max.
200%	1	300	0.5	100
300%	0.2	30	0.1	15
500%	0.1	10	0.05	1

Physical Specifications

Materials	Body : Ceramic
	Terminals : 10A-30A: Stud Mount, Center Terminal (Tin Plated Brass); Stud Mount, Bottom Terminal (Tin Plated Copper); Wave solder, 1-pin PCB mount (Silver Plated Brass); Wave solder, 2-pin PCB mount (Tin Plated Copper). 40A-50A: Wave solder, 3-pin PCB mount (Tin Plated Copper); Stud Mount, Bottom Terminal (Tin Plated Copper)
Marking	On Fuse :
	"bel", "0AKL",
	"Current Rating", "Voltage Rating"
	On Label :
	"bel", "0AKLX", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "  , "  "(China RoHS compliant).


Ratings

Ampere Rating / Voltage Rating	Ampere Range / Volt @ I.R. ability*
10A-50A / 1000V DC	10A-50A / 1000V @ 50kA DC
*I.R.= Interrupting Rating = Short Circuit Rating(Amps)	



Specifications subject to change without notice

Temperature Re-Rating Curve

Operating Temperature: -40°C to +125°C,
with proper rerating factor applied

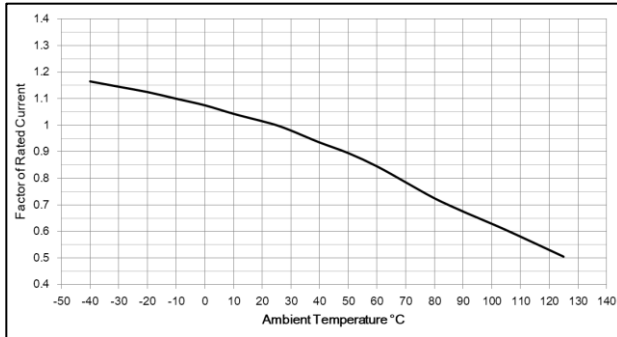

Average Time Current Curve

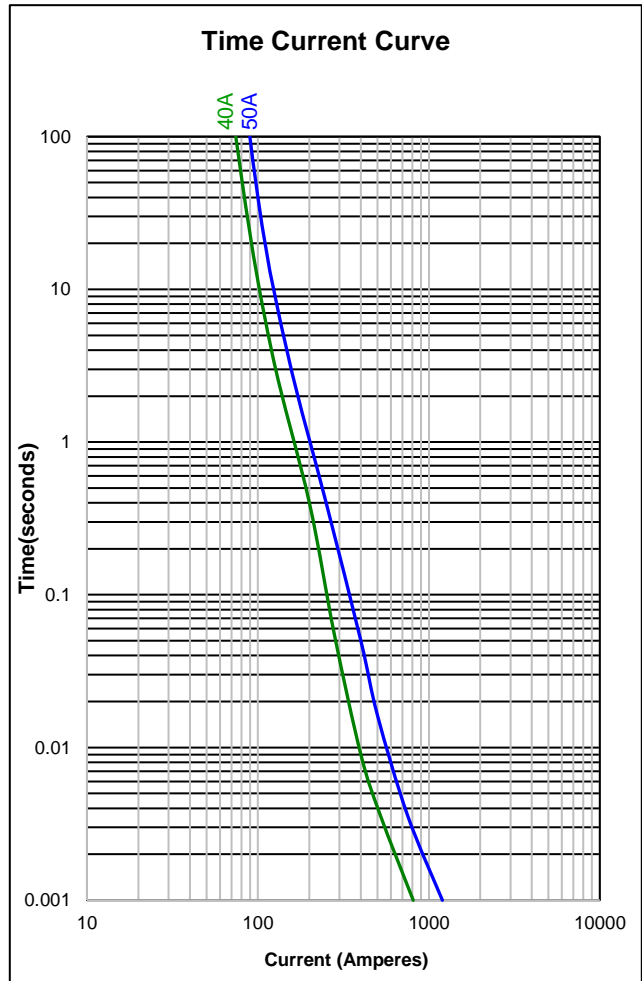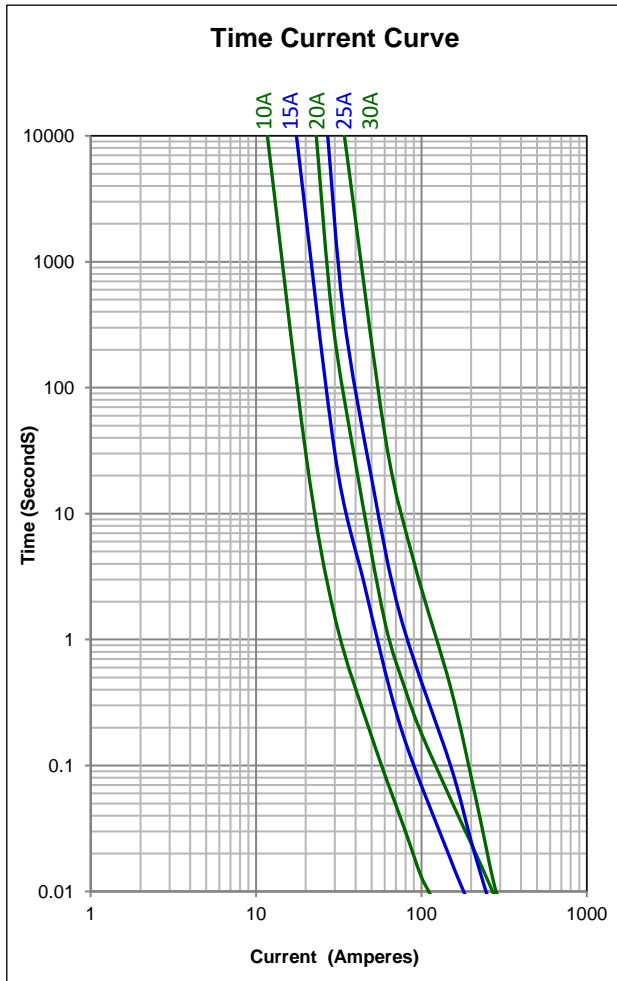

Specifications subject to change without notice

Bel Fuse Inc.
300 Executive Drive, Suite 300,
West Orange, NJ 07052 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

Electrical Specifications

Part Number	Ampere Rating	Voltage and Interrupting Ratings	Typical cold resistance (mOhms)	Typical voltage drop (mV)		Typical pre-arcing I ² t** (A ² sec)
				At 0.5In	At 1.0In	
0AKLx9100-xx	10A	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	12.5	60	130	120
0AKLx9150-xx	15A		7.2	60	140	405
0AKLx9200-xx	20A		5.2	80	154	1450
0AKLx9250-xx	25A		4.0	63	145	560
0AKLx9300-xx	30A		3.1	56	150	650

Consult manufacturer for other ratings

*Temperature Rise: <=50K with 70% of rated current

** Typical pre-arcing I²t measured at 10In

Part Number	Ampere Rating	Voltage and Interrupting Ratings	Power Loss@0.5In (W)	Typical pre-arcing I ² t** (A ² sec)
0AKLx9400-xx	40A	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	1.3	1440
0AKLx9500-xx	50A		1.45	4000

** Typical pre-arcing I²t measured at 10In

Fuse FGNO Explanation

0AKL X [XXXX] -XX

0AKLA/B/E/W=0AKLA/B/E/W; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Amps	Bel FGNO[XXXX]	Amps	Bel FGNO[XXXX]
10	9100	25	9250
15	9150	30	9300
20	9200	40	9400
		50	9500




Specifications subject to change without notice

Bel Fuse Inc.
300 Executive Drive, Suite 300,
West Orange, NJ 07052 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

Mechanical Dimensions

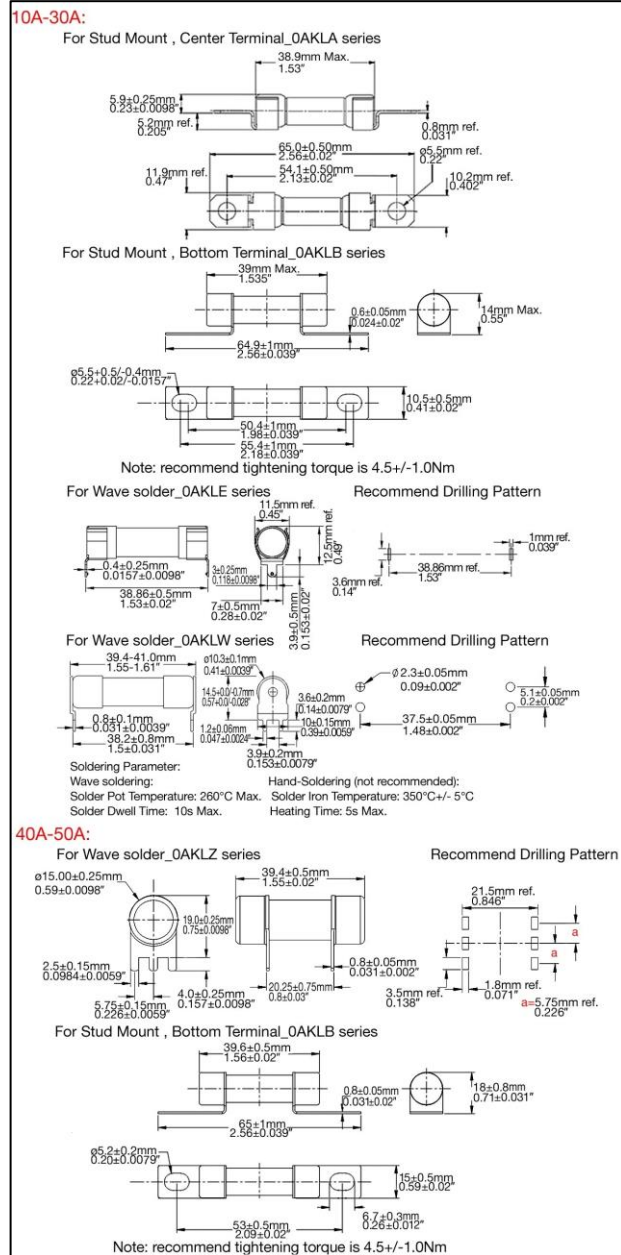

Ordering Information

0AKL X XXXX - X X

FUSE TYPE _____
 0AKL

MOUNTING TAB STYLE _____
 A = For Stud Mount, Center Terminal
 B = For Stud Mount, Bottom Terminal
 E = For Wave solder(1-pin PCB mount)
 W = For 10A-30A Wave solder(2-pin PCB mount)
 Z = For 40A-50A Wave solder(3-pin PCB mount)

AMPERE RATING _____
 Refer to fuse FGNO explanation table

PACKING/QUANTITY CODE _____
 BE (for 0AKLE, 10A-30A Wave solder, 1-pin PCB mount)
 B = Bulk
 E = 20pcs/inner box, 700pcs/carton box

BF (for 0AKLA, 10A-30A Stud mount, center terminal)
 B = Bulk
 F = 20pcs/inner box, 1200pcs/carton box

PD (for 0AKLB, 10A-30A Stud Mount, Bottom Terminal)
 P = Plastic tray pack
 D = 40pcs/tray, 400pcs/carton box

BE (for 0AKLW, 10A-30A Wave solder, 2-pin PCB mount)
 B = Bulk
 E = 20pcs/inner box, 640pcs/carton box

BB (for 0AKLZ, 40A-50A Wave solder, 3-pin PCB mount)
 B = Bulk
 B = 10pcs/inner box, 240pcs/carton box

BC (for 0AKLB, 40A-50A Stud Mount, Bottom Terminal)
 B = Bulk
 C = 12pcs/inner box, 324pcs/carton box

Packaging

Packaging Option	Quantity	Packaging Code
Plastic tray (For 0AKLB 10A~30A)	40 pcs/plastic tray, 400pcs/ carton box	PD
Bulk (For 0AKLE 10A~30A)	20pcs / inner box, 700pcs (35 inner boxes) / carton box	BE
Bulk (For 0AKLA 10A~30A)	20pcs / inner box, 1200pcs (60 inner boxes) / carton box	BF
Bulk (For 0AKLW 10A~30A)	20pcs/inner box, 640pcs (32 inner boxes) /carton box	BE
Bulk (For 0AKLZ 40A~50A)	10pcs/inner box, 240pcs (24 inner boxes) /carton box	BB
Bulk (For 0AKLB 40A~50A)	12pcs / inner box, 324pcs (27 inner boxes) / carton box	BC



Specifications subject to change without notice

Bel Fuse Inc.
 300 Executive Drive, Suite 300,
 West Orange, NJ 07052 USA

+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection