



# IXYH100N65C5

## 650 V, 100 A Gen5 XPT™ IGBT

Extreme Light Punch Through IGBT for 20–60 kHz Switching

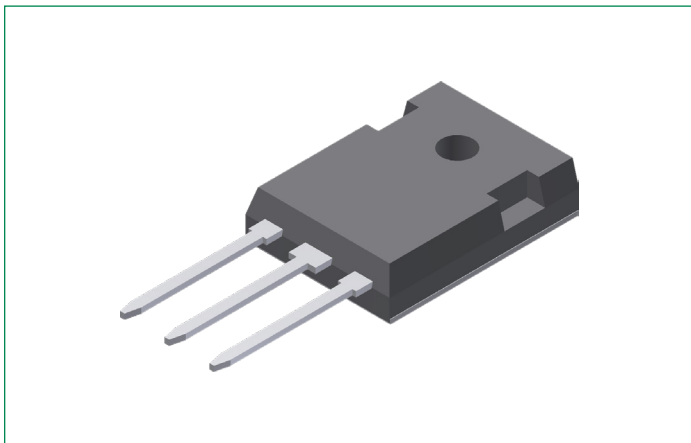

### Pinout Diagram (TO-247-3L)

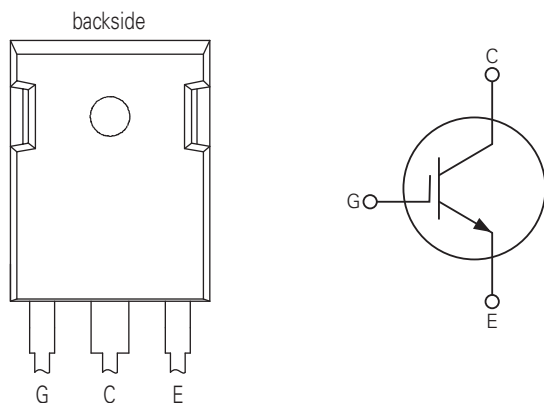

**G:** Gate; **C:** Collector; **E:** Emitter; **backside:** Collector

### Description:

Developed using our proprietary XPT™ thin-wafer technology and state-of-the-art Trench IGBT process, these devices feature reduced thermal resistance, low energy losses, fast switching, low tail current, and high current densities.

### Features & Benefits:

- Optimized for 20–60 kHz Switching
- Square RBSOA
- High Surge Current Capability
- International Standard Package

### Applications:

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

### Product Summary

| Characteristic | Value | Unit |
|----------------|-------|------|
| $V_{CES}$      | 650   | V    |
| $I_{C110}$     | 100   | A    |
| $V_{CE(sat)}$  | 1.68  | V    |
| $t_{fi(typ)}$  | 24    | ns   |

## Maximum Ratings

| Symbol          | Characteristic                                                        | Conditions                                                                                                                                | Value      | Unit               |
|-----------------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------|
| $V_{CES}$       | Collector-Emitter Voltage                                             | $T_J = 25^{\circ}\text{C}$ to $175^{\circ}\text{C}$                                                                                       | 650        | V                  |
| $V_{GES}$       | Gate-Emitter Voltage                                                  | Continuous                                                                                                                                | $\pm 20$   | V                  |
| $V_{GEM}$       | Transient Gate-Emitter Voltage                                        | Transient                                                                                                                                 | $\pm 30$   | V                  |
| $I_{C25}$       | Continuous Collector Current                                          | $T_C = 25^{\circ}\text{C}$                                                                                                                | 230        | A                  |
| $I_{LRM}$       | Lead Current Limit                                                    | –                                                                                                                                         | 160        | A                  |
| $I_{C110}$      | Continuous Collector Current                                          | $T_C = 110^{\circ}\text{C}$                                                                                                               | 100        | A                  |
| $I_{CM}$        | Pulsed Collector Current                                              | $T_C = 25^{\circ}\text{C}$ , 1 ms                                                                                                         | 560        | A                  |
| SSOA<br>(RBSOA) | Switching Safe Operating Area<br>(Reverse Biased Safe Operating Area) | $V_{GE} = 15\text{ V}$ , $T_{VJ} = 125^{\circ}\text{C}$ , $R_G = 3\ \Omega$ ,<br>Clamped Inductive Load, $I_{CM}$ @ $V_{CE} \leq V_{CES}$ | 200        | A                  |
| $P_C$           | Collector Power Dissipation                                           | $T_C = 25^{\circ}\text{C}$                                                                                                                | 750        | W                  |
| $T_J$           | Junction Temperature                                                  | –                                                                                                                                         | -55 to 175 | $^{\circ}\text{C}$ |
| $T_{JM}$        | Maximum Junction Temperature                                          | –                                                                                                                                         | 175        | $^{\circ}\text{C}$ |
| $T_{stg}$       | Storage Temperature                                                   | –                                                                                                                                         | -55 to 175 | $^{\circ}\text{C}$ |
| $T_{SOLD}$      | Lead Temperature for Soldering                                        | 1.6 mm (0.062 in.) from Case for 10 s                                                                                                     | 300        | $^{\circ}\text{C}$ |
|                 |                                                                       | Plastic Body for 10 s                                                                                                                     | 260        |                    |
| $M_d$           | Mounting Torque                                                       | –                                                                                                                                         | 1.13 / 10  | Nm/lb.in           |
| W               | Weight                                                                | –                                                                                                                                         | 6          | g                  |

## Thermal Characteristics

| Symbol       | Characteristic                        | Value |      |      | Unit                        |
|--------------|---------------------------------------|-------|------|------|-----------------------------|
|              |                                       | Min.  | Typ. | Max. |                             |
| $R_{th, JC}$ | Thermal Resistance, junction-to-case  | –     | –    | 0.18 | $^{\circ}\text{C}/\text{W}$ |
| $R_{th, CS}$ | Thermal Resistance, case-to-heat sink | –     | 0.21 | –    | $^{\circ}\text{C}/\text{W}$ |

## Electrical Characteristics – Static ( $T_J = 25^{\circ}\text{C}$ unless otherwise specified)

| Symbol        | Characteristic                                    | Conditions                                                                 | Value |      |           | Unit          |
|---------------|---------------------------------------------------|----------------------------------------------------------------------------|-------|------|-----------|---------------|
|               |                                                   |                                                                            | Min.  | Typ. | Max.      |               |
| $BV_{CES}$    | Collector-Emitter Breakdown Voltage               | $I_C = 250\ \mu\text{A}$ , $V_{GE} = 0\text{ V}$                           | 650   | –    | –         | V             |
| $V_{GE(th)}$  | Gate-Emitter Threshold Voltage                    | $I_C = 250\ \mu\text{A}$ , $V_{CE} = V_{GE}$                               | 3.7   | –    | 5.8       | V             |
| $I_{GES}$     | Gate-Emitter Leakage Current                      | $V_{CE} = 0\text{ V}$ , $V_{GE} = \pm 20\text{ V}$                         | –     | –    | $\pm 100$ | nA            |
| $I_{CES}$     | Zero Gate Voltage Collector Current               | $V_{CE} = V_{CES}$ , $V_{GE} = 0\text{ V}$                                 | –     | –    | 25        | $\mu\text{A}$ |
|               |                                                   | $V_{CE} = V_{CES}$ , $V_{GE} = 0\text{ V}$ , $T_J = 150^{\circ}\text{C}$   | –     | –    | 750       | $\mu\text{A}$ |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage <sup>1</sup> | $I_C = 75\text{ A}$ , $V_{GE} = 15\text{ V}$                               | –     | 1.68 | 2.00      | V             |
|               |                                                   | $I_C = 75\text{ A}$ , $V_{GE} = 15\text{ V}$ , $T_J = 150^{\circ}\text{C}$ | –     | 1.92 | –         | V             |

**Note 1:** Pulse test,  $t \leq 300\ \mu\text{s}$ , duty cycle,  $d \leq 2\%$

**Electrical Characteristics – Dynamic** ( $T_J = 25^\circ\text{C}$  unless otherwise specified)

| Symbol       | Characteristic                   | Conditions                                                                                                                 |                           | Value |      |      | Unit |  |
|--------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------------------------|-------|------|------|------|--|
|              |                                  |                                                                                                                            |                           | Min.  | Typ. | Max. |      |  |
| $g_{fs}$     | Transconductance <sup>1</sup>    | $I_C = 60\text{ A}, V_{CE} = 10\text{ V}$                                                                                  |                           | 46    | 77   | –    | S    |  |
| $C_{ies}$    | Input Capacitance                | $V_{GE} = 0\text{ V}, V_{CE} = 25\text{ V}, f = 1\text{ MHz}$                                                              |                           | –     | 5460 | –    | pF   |  |
| $C_{oes}$    | Output Capacitance               |                                                                                                                            |                           | –     | 245  | –    |      |  |
| $C_{res}$    | Reverse Transfer Capacitance     |                                                                                                                            |                           | –     | 180  | –    |      |  |
| $Q_{g(on)}$  | Total Gate Charge                | $V_{GE} = 15\text{ V}, V_{CE} = 0.5 \times V_{CES},$<br>$I_C = 100\text{ A}$                                               |                           | –     | 313  | –    | nC   |  |
| $Q_{ge}$     | Gate-Emitter Charge              |                                                                                                                            |                           | –     | 43   | –    |      |  |
| $Q_{gc}$     | Gate-Collector Charge            |                                                                                                                            |                           | –     | 150  | –    |      |  |
| $t_{d(on)}$  | Turn-on Delay Time <sup>2</sup>  | Inductive Load,<br>$V_{GE} = 15\text{ V},$<br>$V_{CE} = 300\text{ V},$<br>$I_C = 50\text{ A},$<br>$R_{G(ext)} = 2\ \Omega$ | $T_J = 25^\circ\text{C}$  | –     | 40   | –    | ns   |  |
|              |                                  |                                                                                                                            | $T_J = 150^\circ\text{C}$ | –     | 37   | –    |      |  |
| $t_{ri}$     | Turn-on Rise Time <sup>2</sup>   |                                                                                                                            | $T_J = 25^\circ\text{C}$  | –     | 50   | –    | ns   |  |
|              |                                  |                                                                                                                            | $T_J = 150^\circ\text{C}$ | –     | 36   | –    |      |  |
| $E_{on}$     | Turn-on Energy <sup>2</sup>      |                                                                                                                            | $T_J = 25^\circ\text{C}$  | –     | 0.56 | –    | mJ   |  |
|              |                                  |                                                                                                                            | $T_J = 150^\circ\text{C}$ | –     | 0.72 | –    |      |  |
| $t_{d(off)}$ | Turn-off Delay Time <sup>2</sup> |                                                                                                                            | $T_J = 25^\circ\text{C}$  | –     | 255  | –    | ns   |  |
|              |                                  |                                                                                                                            | $T_J = 150^\circ\text{C}$ | –     | 205  | –    |      |  |
| $t_{fi}$     | Turn-off Fall Time <sup>2</sup>  |                                                                                                                            | $T_J = 25^\circ\text{C}$  | –     | 24   | –    | ns   |  |
|              |                                  |                                                                                                                            | $T_J = 150^\circ\text{C}$ | –     | 22   | –    |      |  |
| $E_{off}$    | Turn-off Energy <sup>2</sup>     |                                                                                                                            | $T_J = 25^\circ\text{C}$  | –     | 0.78 | –    | mJ   |  |
|              |                                  |                                                                                                                            | $T_J = 150^\circ\text{C}$ | –     | 0.76 | –    |      |  |

**Note 1:** Pulse test,  $t \leq 300\ \mu\text{s}$ , duty cycle,  $d \leq 2\%$ **Note 2:** Switching times and energy losses may increase for higher  $V_{CE(clamp)}$ ,  $T_J$ , or  $R_G$ .

## Characteristic Curves

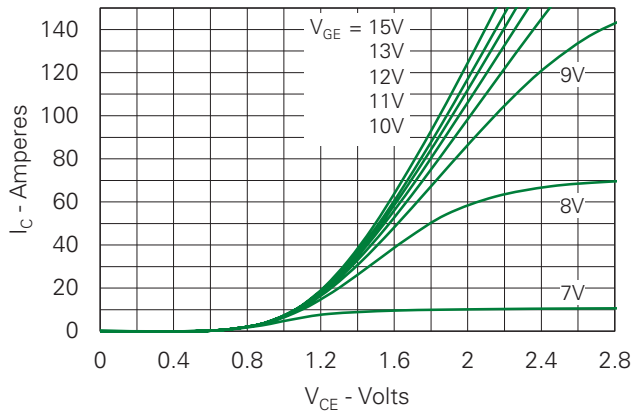
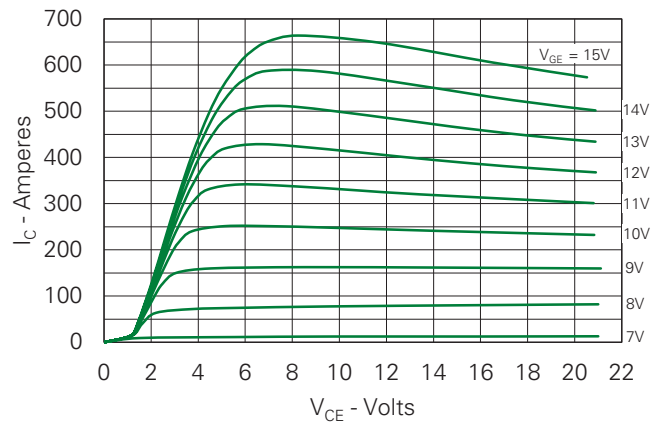
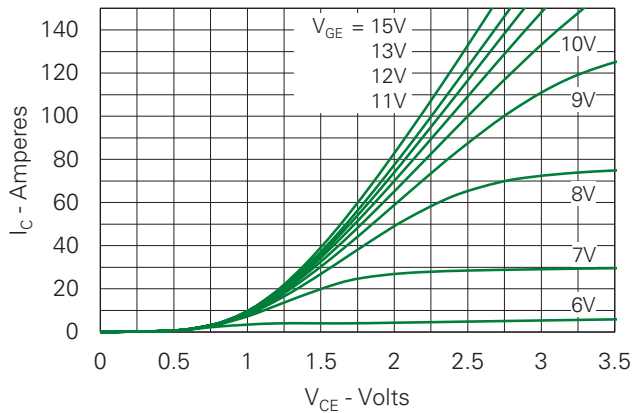
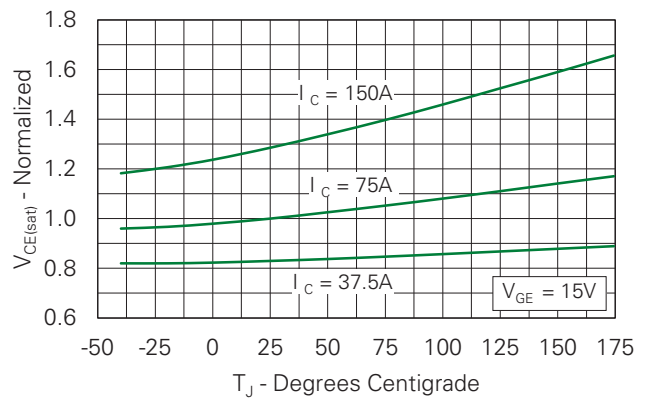
Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$ Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$ Fig. 3. Output Characteristics @  $T_J = 150^\circ\text{C}$ Fig. 4. Dependence of  $V_{CE(sat)}$  on Junction Temperature

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

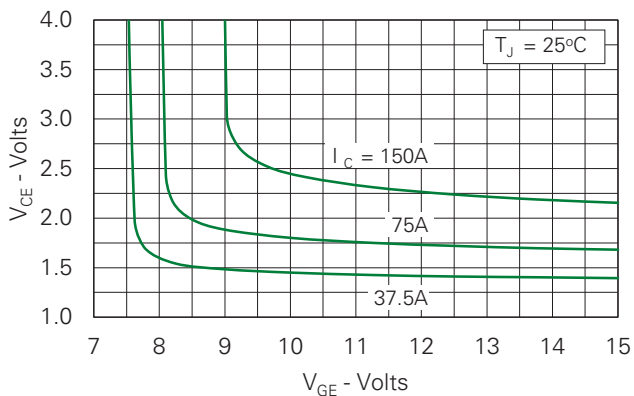


Fig. 6. Input Admittance

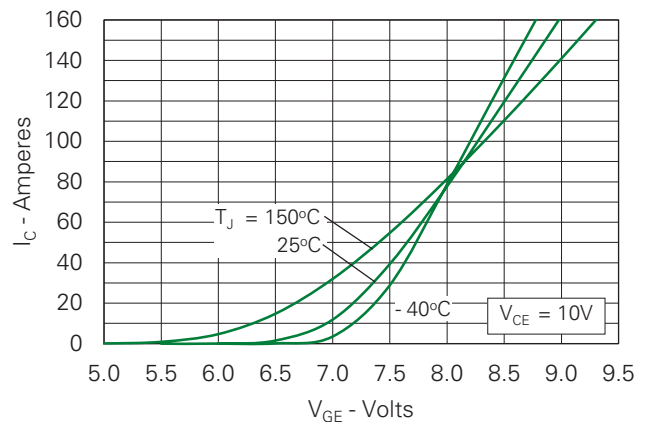


Fig. 7. Transconductance

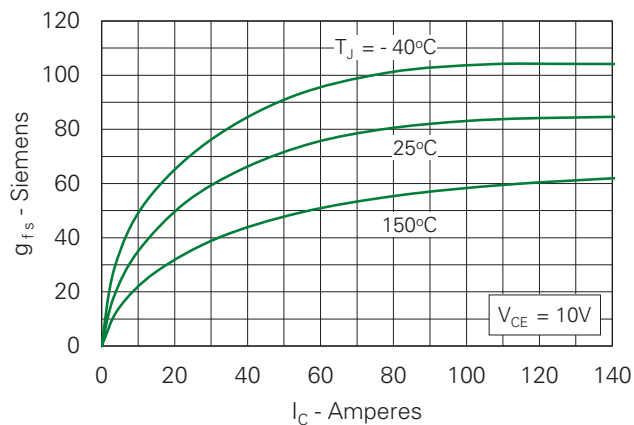


Fig. 8. Gate Charge

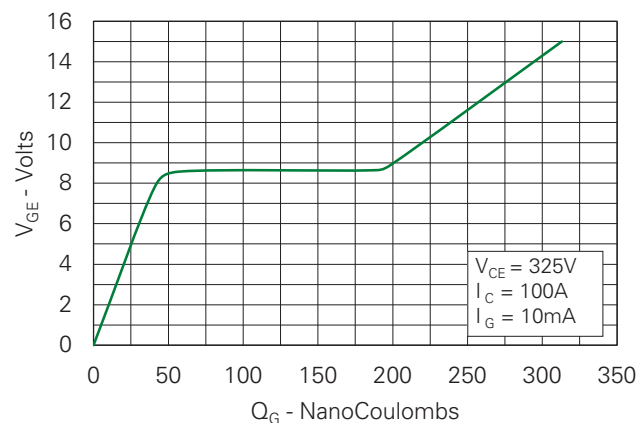


Fig. 9. Capacitance

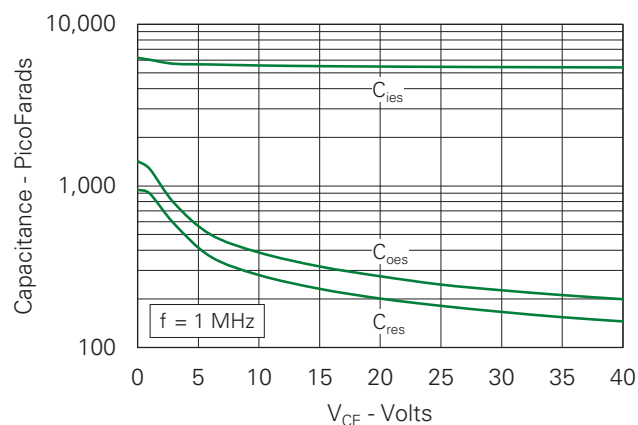


Fig. 10. Reverse-Bias Safe Operating Area

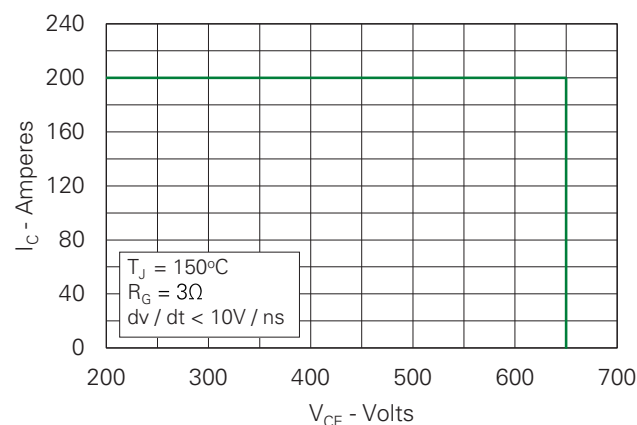


Fig. 11. Maximum Transient Thermal Impedance

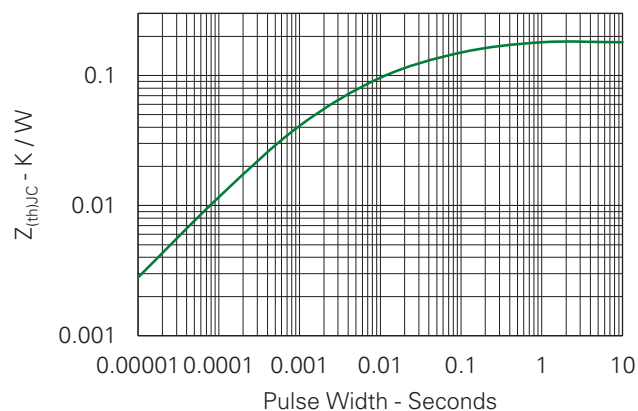
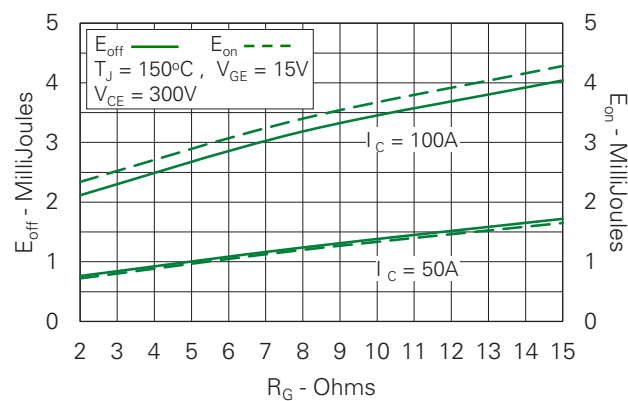


Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance



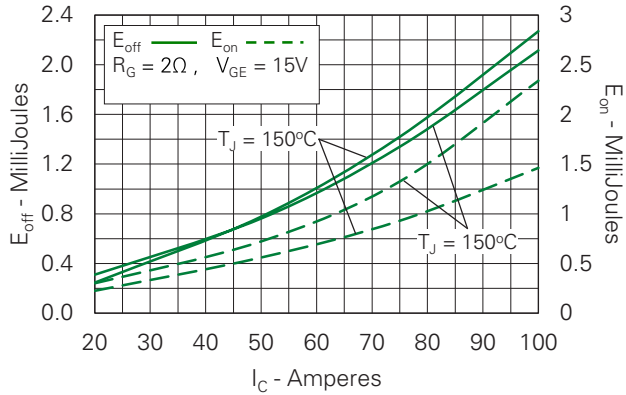
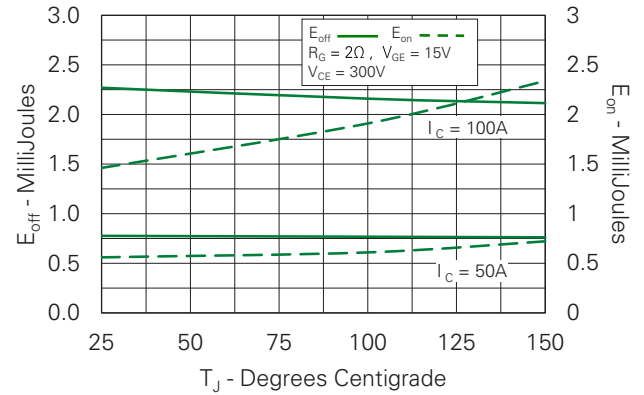
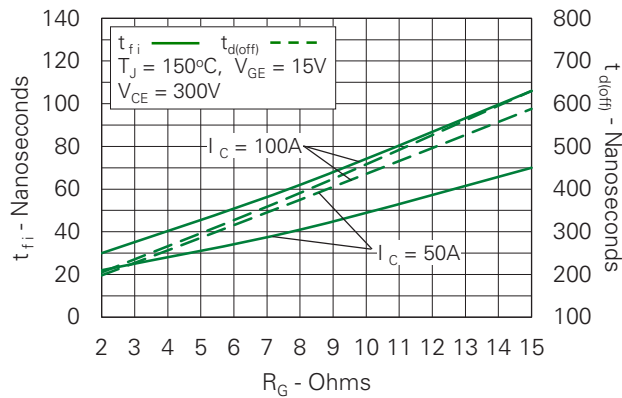
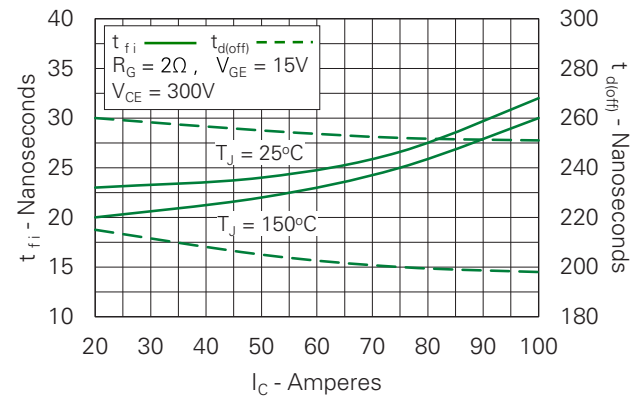
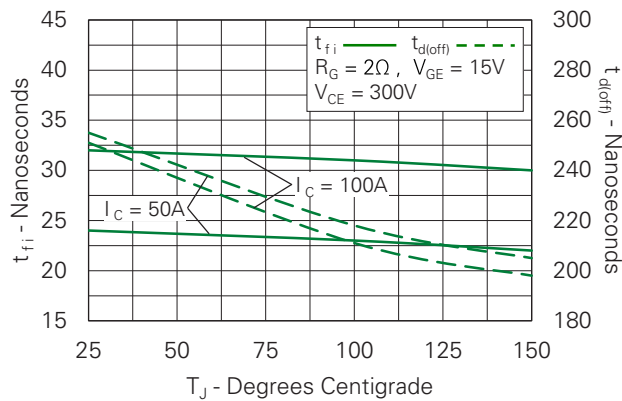
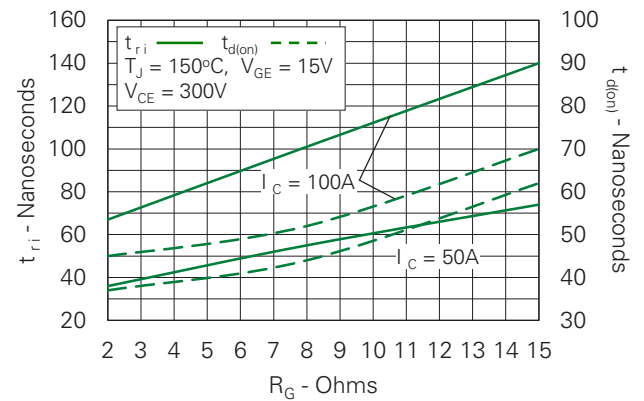
**Fig. 13. Inductive Switching Energy Loss vs. Collector Current****Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature****Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance****Fig. 16. Inductive Turn-off Switching Times vs. Collector Current****Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature****Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance**

Fig. 19. Inductive Turn-on Switching Times vs. Collector Current

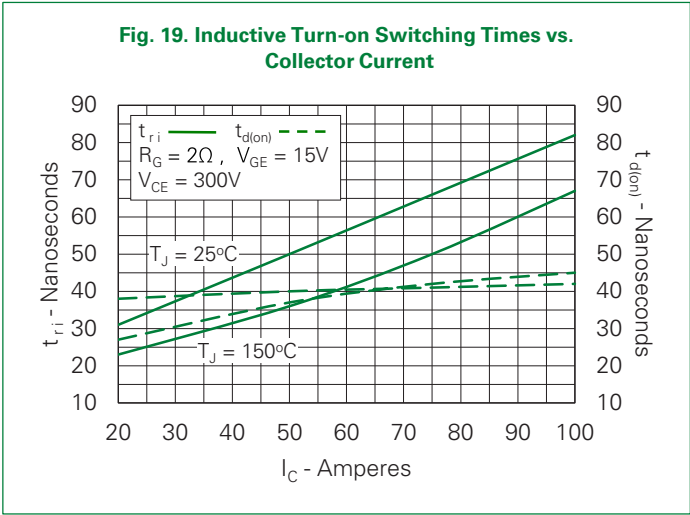


Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature



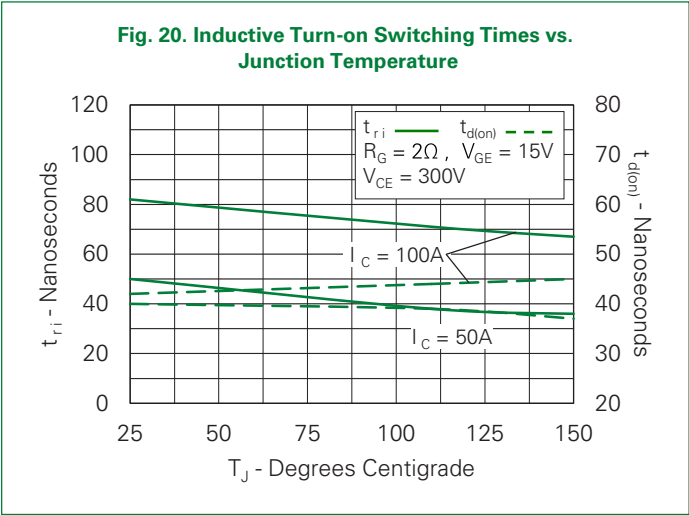


Fig. 21. Maximum Peak Load Current vs. Frequency

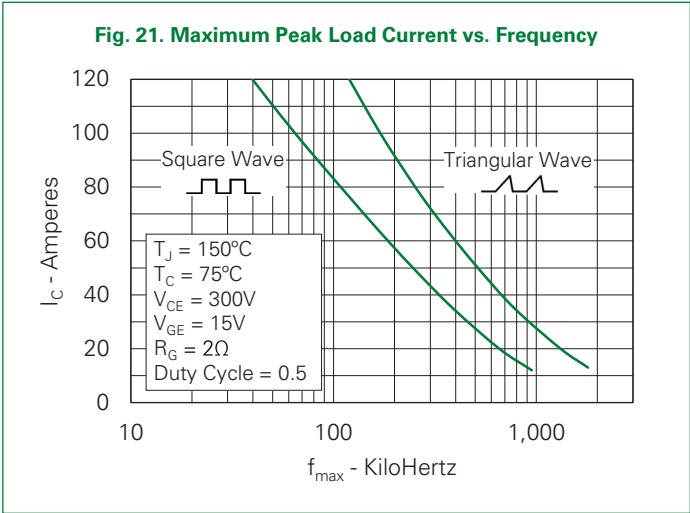

Part Outline Drawing (TO-247-3L)

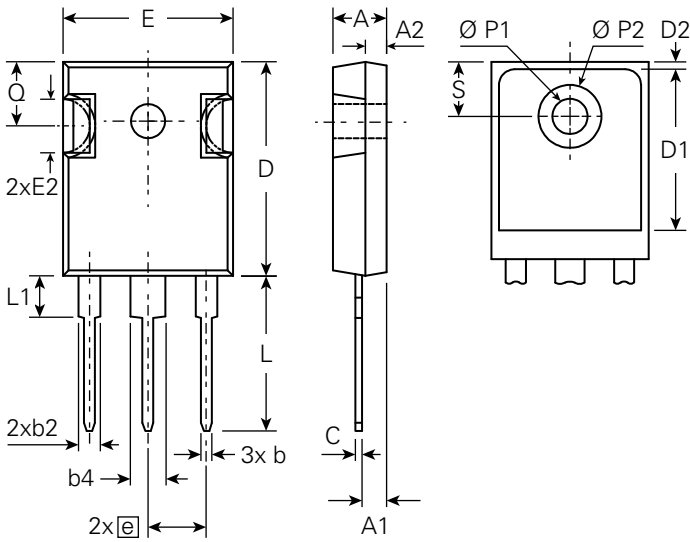

| Symbol | Inches    |         |       | Millimeters |         |       |
|--------|-----------|---------|-------|-------------|---------|-------|
|        | Min.      | Typical | Max.  | Min.        | Typical | Max   |
| A      | 0.185     | –       | 0.209 | 4.70        | –       | 5.30  |
| A1     | 0.087     | –       | 0.102 | 2.21        | –       | 2.59  |
| A2     | 0.059     | –       | 0.098 | 1.50        | –       | 2.49  |
| b      | 0.039     | –       | 0.055 | 0.99        | –       | 1.40  |
| b2     | 0.065     | –       | 0.094 | 1.65        | –       | 2.39  |
| b4     | 0.102     | –       | 0.135 | 2.59        | –       | 3.43  |
| c      | 0.015     | –       | 0.035 | 0.38        | –       | 0.89  |
| D      | 0.819     | –       | 0.844 | 20.79       | –       | 21.45 |
| D1     | 0.515     | –       | –     | 13.07       | –       | –     |
| D2     | 0.020     | –       | 0.053 | 0.51        | –       | 1.35  |
| E      | 0.609     | –       | 0.639 | 15.48       | –       | 16.24 |
| E1     | 0.530     | –       | –     | 13.45       | –       | –     |
| E2     | 0.170     | –       | 0.216 | 4.31        | –       | 5.48  |
| e      | 0.215 BSC |         |       | 5.45 BSC    |         |       |
| L      | 0.780     | –       | 0.799 | 19.80       | –       | 20.30 |
| L1     | –         | –       | 0.177 | –           | –       | 4.49  |
| Ø P1   | 0.140     | –       | 0.144 | 3.55        | –       | 3.65  |
| Ø P2   | –         | –       | 0.291 | –           | –       | 7.39  |
| Q      | 0.212     | –       | 0.244 | 5.38        | –       | 6.19  |
| S      | 0.242 BSC |         |       | 6.14 BSC    |         |       |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.