

**Product Specifications**

**Electrical Specifications**


**Voltage Rating:**

- 250VAC (100mA~30A)
- 125VAC (100mA~30A)
- 32VAC (12A~30A)

**Interrupting Rating**

- 35A @250VAC (100mA~1A)
- 10kA @125VAC (100mA~10A)
- 100A @250VAC (1.25A~3.5A)
- 200A @250VAC (4A~30A)
- 1000A @32VAC (12A~30A)
- 100A @125VAC (12A~30A)

**Mechanical Dimensions: Inches [mm]**

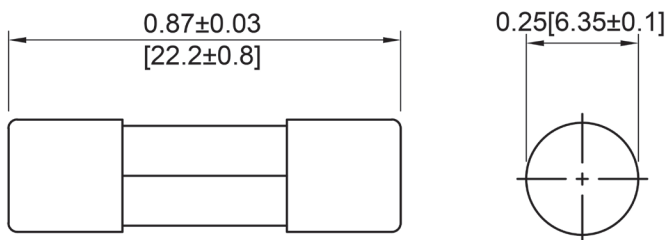

**Part Numbers Information**

Cartridge P/N	Amperage Rating
FSW-100mA	100mA
FSW-125mA	125mA
FSW-160mA	160mA
FSW-200mA	200mA
FSW-250mA	250mA
FSW-300mA	300mA
FSW-315mA	315mA
FSW-400mA	400mA
FSW-500mA	500mA
FSW-600mA	600mA
FSW-700mA	700mA
FSW-800mA	800mA
FSW-1A	1A
FSW-1.25A	1.25A
FSW-1.5A	1.5A
FSW-1.6A	1.6A
FSW-2A	2A
FSW-2.5A	2.5A
FSW-3A	3A
FSW-3.15A	3.15A
FSW-3.5A	3.5A
FSW-4A	4A
FSW-5A	5A
FSW-6A	6A
FSW-6.3A	6.3A
FSW-7A	7A
FSW-7.5A	7.5A
FSW-8A	8A
FSW-9A	9A
FSW-10A	10A
FSW-12A	12A
FSW-13A	13A
FSW-15A	15A
FSW-16A	16A
FSW-20A	20A
FSW-25A	25A
FSW-30A	30A

**Time vs Percent of Rated Current**

% of Rated Current	Opening Time (100mA~30A)	
	Min	Max
100%	4hr	-
135%	-	3600s
200%	-	120s

**Rev**    **Date of issue**    **Revision Notes**

**Designed**    **Approved**

C	07-10-2024	Updated To New Style	RC	OF
---	------------	----------------------	----	----